

BY Clifford J. Mugnier, CP, CMS, FASPRS


THE REPUBLIC OF GHANA

The Grids & Datums column has completed an exploration of every country on the Earth. For those who did not get to enjoy this world tour the first time, *PE&RS* is reprinting prior articles from the column. This month's article on The Republic of Ghana was originally printed in 2000 but contains updates to their coordinate system since then.

ased on archaeological evidence, it has been established that Ghana was inhabited by humans 300,000 years ago. By 2,000 B.C., domesticated animals such as cattle and guinea fowl were being raised. Modern Ghana takes its name from the ancient Kingdom of Ghana, some 800 km to the north of the present-day capitol of Accra, which flourished up to the eleventh century A.D. In 1471, the Portuguese arrived at the "De Costa da el Mina de Ouro," (the Coast of Gold Mines). In 1486, slaves from Benin were introduced to the port of Elmina. This was the beginning of the slave trade on the Gold Coast, and eventually the more profitable slaves replaced the gold trade. The British Crown Colony of the Gold Coast received its independence from England in 1957.

The Republic of Ghana lies on the western coast of tropical Africa. Ghana extends for a maximum of 672 km from north to south between latitudes 4.5°N and 11°N, and for 536 km east to west between longitudes 3°W and 1°E. It is bordered to the west (668 km) by Cote d'Ivoire (Ivory Coast), to the north (548 km) by Burkina Faso, to the east (877 km) by Togo, and to the south (539 km) by the Gulf of Guinea and the Atlantic Ocean.

On May 21, 1929 Capt. J. Calder Wood, M.C. of the Gold Coast Sur-vey Department wrote: "In June, 1904, observations for latitude were taken by Capt. F. G. Guggisberg, R.E.(now Sir F. G. Guggisberg, K.C.M.G., D.S.O., Governor of the Gold Coast Colony), from a pillar in the com-pound of the house of the Secretary for Native Affairs in Accra. Fifteen pairs of stars were observed with a zenith telescope, giving a final probable error of 0.360". This point was subsequently connected by traverse to the Gold Coast Survey beacon No. 547 in Accra. The longitude of Accra was determined by the exchange of telegraphic signals with Cape Town in November and December, 1904, and the resulting longitude of G.C.S. 547 obtained."

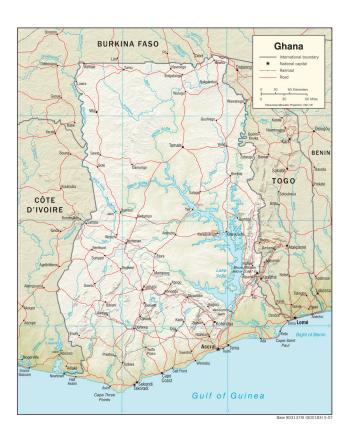

"The pillar G.C.S. 547 was connected to the pillar at Leigon, eight miles from Accra, by means of triangulation, and the resulting values of the Leigon pillar have been adopted as the basic latitude and longitude for the Colony. Subsequent determinations of latitude during the last two years at points throughout the country which have been accurately connected with Leigon by triangulation tend to indicate that the latitude and longitude observations taken at Accra are seriously influenced by local attraction. The conditions obtained near the Coast do not appear to be reproduced further inland, and it may happen in course of time, when more data are avail-able, that a new basic latitude and longitude will be adopted from in-land observations which will give a better

Photogrammetric Engineering & Remote Sensing Vol. 84, No. 2, February 2018, pp. 61–63. 0099-1112/17/61–63

© 2018 American Society for Photogrammetry and Remote Sensing datum point for the county as a whole. Sufficient comparison be-tween the astronomical and trigonometrical, or geodetic, values have not yet been obtained to warrant an immediate change."

The astronomical values observed for (G.C.S. 121) Leigon were: $\Phi_0 = 5^{\circ} 38' 54.39''$ North, and $\lambda_0 = -0^{\circ} 11' 52.65''$ West of Greenwich. The corresponding geodetic coordinates of the same Accra Datum of 1929 origin point that were computed from the tri-angulation were: $\phi_0 = 5^{\circ} 38' 52.270''$ North, and $\lambda_0 = -0^{\circ} 11' 46.080''$ West of Greenwich. In 1928, as other observations were being taken at Leigon, it was decided to observe an azimuth there to test an intermediate side of the triangulation. The azimuth observed from Leigon to station (G.C.S. 113) Asofa was: $\alpha_0 = 264^{\circ} 48' 48.78''$. The ellipsoid of reference is the War Office 1926 (McCaw 1924) where a = 6,378,300 meters (20,926,201.2257 feet), and $\frac{1}{f}$ = 296. Note that this conversion from feet to meters is specific to Ghana, and the elevation of Leigon is 147.46 meters. As of late 1996, the transformation parameters from Accra Datum of 1929 to WGS 84 Da-tum were based on three collocated points where: $\Delta X = -199 \text{ m}, \Delta Y = +32 \text{ m}, \Delta Z = +322 \text{ m}.$

Capt. Wood continued, "For the purposes of cadastral work geo-graphical coordinates are inconvenient, and in their place plane rectangular coordinates on the transverse mercator (sic) projection have been adopted. The whole Colony has been placed on the same origin, the central meridian being the meridian 1° W and the origin of the X coordinates 4° 40′ N. 900,000 is added to all Y coordinates, in order to avoid negative coordinates, and the maximum scale error has been reduced in the customary manner by reducing the scale of the projection by 1/4000, so that the scale error nowhere exceeds this value except on the extreme edges of the Colony."

For instance, "Leigon (G.C.S. 121). District Accra. Locality west of road junction at 8th mile Acra-Dodowa road. Approach through low bush from junction of Aburi and Dodowa roads. Bare hill with good all round view. Concrete pillar 14" high by 9 1/2" by 7" with iron pipe as centre mark. Beacon double quadripod of squared timber, 17' high, centered over old mark." The geodetic coordinates of Leigon equate to Colony coordinates of X = 356,084.33 ft., Y = 1,192,117.91 ft. As I always point out; if your double- or quadruple-precision software does not exactly match the local transformation results, your software is wrong for that country. Colony coordinates are truncated Gauss-Schreiber Transverse Mercator transformations that are similar to those used in the United States for the NAD 1927 State Plane Coordinate Systems. They are not computed the same way as the Gauss-Krüger Transverse Mercator transformations normally done with other Grid systems such as the UTM and the NAD 1983 State Plane Coordinate Systems.

According to J. Clendinning in Empire Survey Review, January 1934: "The Akuse-Obuasi, Obuasi-Nsuta and Akuse-Apam chains were computed in terms of geographical coordinates which were later con-verted into rectangular coordinates on the projection system; but all re-cent work, both triangulation and traverse, has been computed directly on the projection system, the necessary corrections to distances and bearings as measured on the ground being applied to enable this to be done." In that same paper, Clendinning also commented on the surroundings of the Gold Coast in that "The denseness of the forest and the topographical features of the country naturally determine the na-ture of the survey." With that ter-rain in mind for Ghana, the *Textbook of Topographical Surveying*, Her Majesty's Stationery Office, London, 1965, pp. 221, 222 offered the following description: "311. The rope and sound traverse.

In West Africa, the minor bush tracks maintain their general direction for considerable distances but wind about just sufficiently to pre-vent a sight being taken down the track. A system of survey which has been used in these conditions is as follows. The bearings of the traverse legs are observed from a compass station to sound. This sound may be either a call or a whistle from a forward chainman. The length of the legs is measured with a rope. This rope is made of a length allowing for the wind in the path. Thus it is normally found that a rope 310 ft. long pulled tight along the path is equivalent to 300 ft. measured direct along the leg of the traverse. The actual allowance must be found by experience of local conditions. The length of the rope should be checked and adjusted be-fore and after work and in the middle of the work.

Using this system, minor bush tracks can be traversed rapidly and it is possible to work through track-less bush doing only a minimum amount of cutting. When under-growth is thick or thorny a shorter rope (100 ft.) may be easier to manipulate. The accuracy of this work is greater than would be expected. There appears to be no systematic error in the observations of bearing and the errors consequently tend to cancel out during the traverse. For work at a scale of 1/125,000, traverses should not be carried for more than five miles by this meth-od. Heights are observed by aneroid barometers. On the Gold Coast, an average of five miles per day can be maintained, and distances of 15 miles have been achieved on single days. If, however, work is continued into the afternoon, as is necessary for such an output, it is necessary to re-run later that part of the aneroid heights which was observed in the period when the diurnal wave is unreliable."

In the Canadian cartographic journal, a letter to the editor told how they were cutting costs by eliminating the forward chainman. "They tied the rope to the tail of a pig and sent it down the path. When the rope became taut, the tail of the pig was pulled and it squealed so they could observe a bearing on that sound. They were working on further improving the method by breeding a special pig that would, in addition, monument the spot when its tail was pulled."

In 1977, the control network was readjusted including extra observations and an improved computation technique. As part of the readjustment the datum was changed. The new Datum was Leigon Datum of 1977, in which the old geographical values for (GCS 121) Leigon were held fixed at the old values and the War Office ellipsoid was replaced by the

Clarke 1880 (modified) ellipsoid where a = 6.378,249.145 meters, and $\frac{1}{f} = 293.465$. The False Easting was changed to 274,319.736 m. In 1991, the National Imagery and Mapping Agency (NIMA) published the three-parameter datum shift values from Leigon Datum of 1978 to WGS 84 based on eight collocated points where: $\Delta X = -130 \text{ m.} \pm 2 \text{ m.}$, $\Delta Y = +29 \text{ m.} \pm 2 \text{ m.}$ 3 m., $\Delta Z = +364$ m. ± 2 m. Out of curiosity, I decided to try an 8-point solution for a 7-parameter Bursa-Wolf shift from Leigon Datum of 1977 to WGS 84 Datum. The resultant was $\Delta X = -110.90$ meters, $\Delta Y = -9.13$ meters, $\Delta Z = +69.46$ meters, Scale = $\pm 3.11 \times 10^6$, $R_x = -1.30$ arc seconds, $R_v = \pm 9.53$ arc seconds, and $R_z = +0.32$ arc seconds. The in-crease in goodness of fit was about ten-fold over the 3-parameter solution. An example data point is station (G.C.S. T20/24) "Wa" on the Leigon Datum of 1977 where: $\phi = 10^{\circ} 02' 47.7770''$ North, and λ = $-2^{\rm o}$ 28′ 17.3746″ West, and a MSL elevation of 359.7 meters with coordinates of "Wa" on the WGS 84 Datum where: $\boldsymbol{\phi}$ = $10^{\circ} 02' 56.3328''$ North, and $\lambda = -2^{\circ} 28' 16.6377''$ West and an ellipsoid height of 385.1 meters. Of course, on the WGS 84 Datum the coordinates are expressed on the UTM Grid, and not on Colony Coordinates.

UPDATE

Ghana has installed a new GPS network of Continuously Operating Reference Stations (Poku-Gyamfi, Y., & Schueler, T., Renewal of Ghana's Geodetic Reference Network, LNEC, Lisbon 2008). Numerous publications have been devoted to an exploration of various math models for modeling the transformation parameters from Accra Datum of 1929 and Leigon Datum of 1977 to WGS84 Datum: (Poku-Gyamfi, Y., & Hein, G., Framework for the Establishment of a Naitonwide Network of Global Navigation Satellite System, 5th FIG Conference, Ghana, 2006), (Dzidefo, A., Determination Transformation Parameters between the World Geodetic System 1984 and the Ghana Geodetic Network. Master's Thesis, Department of Civil and Geomatic Engineering, Kwame Nkrumah University of Science and Technology, Ghana, 2011), and Ziggah, Y.Y., et al, (Novel Approach to improve Geocentric Translation Model Performance Using Artificial Neural Network Technology, Boletim de Ciências Geodésicas - On-Line Version, ISSN 1982-2170, 2017). Work and analyses appears to be primarily in the "Golden Triangle Region" of Ghana.

The contents of this column reflect the views of the author, who is responsible for the facts and accuracy of the data presented herein. The contents do not necessarily reflect the official views or policies of the American Society for Photogrammetry and Remote Sensing and/or the Louisiana State University Center for GeoInformatics (C⁴G). This column was previously published in *PE&RS*.

STAND OUT FROM THE REST

EARN ASPRS CERTIFICATION

ASPRS congratulates these recently Certified and Re-certified individuals:

RECERTIFIED PHOTOGRAMMETRISTS

Michael Rodger Certification #R1330

Effective May 23, 2017, expires May 23, 2022

Mihai Prelipceanu Certification #R1219

Effective December 14, 2017, expires December 14, 2022

Jonathan Helta, Certification #R1344Effective December 14, 2017, expires December 14, 2022

Connie Li Krampf, Certification #R1222 Effective January 24, 2018, expires January 14, 2023

Matthew W. Elious, Certification #R1007 Effective February 6, 2018, expires February 6, 2023

Reida Elwannas, Certification #R1220 Effective October 18, 2017, expires October 18, 2022

RECERTIFIED MAPPING SCIENTISTS GIS/LIS

Lorri Ann Peltz-Lewis Certification #R128GSEffective February 12, 2017, expires February 12, 2022

James A. McCall Certification #R199GS
Effective January 7, 2018, expires, January 7, 2023

RECERTIFIED PHOTOGRAMMETRIC TECHNOLOGIST

Bradley R. Hille Certification #R1291PT

Effective March 1, 2018, expires March 1, 2021

ASPRS Certification validates your professional practice and experience. It differentiates you from others in the profession.

For more information on the ASPRS Certification program: contact certification@asprs.org, visit https://www.asprs.org/general/asprs-certification-program.html



